



Welcome to the Network Rail Ancillaries Protective Clothing Catalogue

This is the Network Rail catalogue for PPE ancillaries, which displays the range of products available on iproc.

This catalogue offers a broad range of products that have been selected by the workforce safety committee for their high quality, fitness for purpose, suitability and comfort to enable you to have the equipment needed to do your job.

PPE is the last line of defence which may not always prevent an injury, but when worn correctly and maintained will minimise the severity. Network Rail also continuously works to eliminate hazards and reduce the likelihood of any occurrences so everyone goes home safe everyday.


All of the items in this catalogue are supplied by Bunzl Greenhams and are available to order via iproc, the Network Rail online ordering system. Once the order has been placed, if any support is required to check on progress or resolve any issues, this is provided by the Network Rail help desk who can be contacted via these methods.

For more information please contact:

Phone 01270 727566

Email PPEcustomerservice@networkrail.co.uk



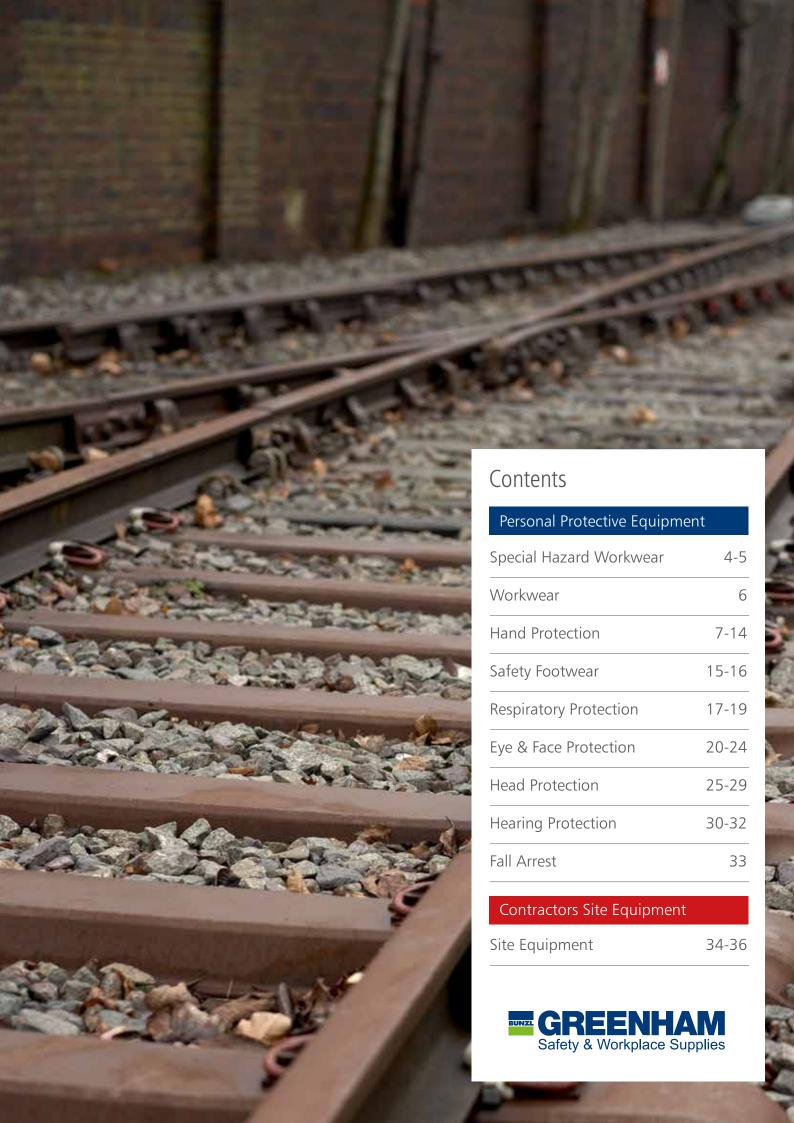

Special Hazard Workwear



3M

3M 4515 Disposable Coverall

• Protects skin from hazardous dusts and limited liquid splashes

Elasticated hood, ankles, cuffs and waist2-way zip with storm flap

Breathable fabric with low lint

Colour: Hi Viz Orange Size: M-2XL

Code: 382054



Kleenguard A10 Blue Hooded Coverall

Colour: Navy Blue Size: S- 3XL Code: 383009



• Light protection from dirt and grease

• Made from 100% polypropylene with zip front

• Elasticated hood and cuffs

Colour: White Size: M-3XL Code: 382020



Special Hazard Workwear





Kleenguard A20+ Type 5/6 Breathable Hooded Coveralls

CONFORMS TO EN 340 COMPLEX DESIGN TYPE 5 $\&\,6$ AND EN 1149-1

- Breathable particle protection coverall
- Protection against particles, fibres and chemical splash
- Durable SMS fabric keeps out 99% of particles larger than 1 micron (I>O.M Aloxite test)
- Triple stitched internal seams protect against tearing. Breathable fabric reduces the risk of heat stress
- Specially designed body, hood and waist for comfort and safety
- Silicone free for critical areas
- EN1073-2 approved for radioactive dust protection
- 97100/10/20/30/40/50

Colour: White Size: S, M, L, XL. XXL, XXXL







Kleenguard A40 Type 5/6 Hooded Coveralls

- Ultra strong fabric and strong triple stitched seams help protect against tearing
- Anti-static fabric EN1149-1 helps reduce the risk of sparking which could cause danger
- Colour coded badge, easily identified protection
- Process protection for critical areas
- Ultra low-lint performance, film laminate and internal seams significantly reduce levels of 'lint'
- Silicone free, ideal for paint-spraying
- Generous cut to the arms and legs for freedom of movement
- Elasticated cuffs, ankles and waist improves garment fit and worker safety
 Full length zip, eases ability to get in/out
- of garment
- Hood designed for mask use and freedom of movement
- 9790/1/2/3/4/5

Colour: White

Size: S, M, L, XL, XXL, XXXL

Workwear

SIOEN

Sioen Chemflex Apron

• 8000 100% polyester knitting with PVC/PU coating 390gm2

Size: 75 x 100cm Colour: Green Code: 300072



Shin Guards

- Designed for protection when using a trimmer or brushcutter
- Polyethylene outer shell covers entire lower leg
- Soft, cushion inside molds to shape of leg
- Lightweight and comfortable to wear
- Quick and easy to put on and off with quick release adjustable buckle straps

Size: 75 x 100cm Colour: Black Code: 504003





Impacto Rubber Knee Pad

- Anti-slip ribbed surface
- Easy on/ off replaceable and adjustable 1" rubber straps fasten to plastic buttons
- Great for heavy duty industrial and construction applications
- Heavy duty
- 885-00

Code: 292221



Welders Leather Gaiter Spat

- Durable 80% polyester, 20% cotton with twill finish
- Genuine Teflon coating repels dirt, grease & water
- Twin needle stitching & bar tacked at stress points
- Double press stud & single button fastening with zip fly
- Knee pad pockets (knee pads not included)
- Elasticated waistband

Size: 30-48"

Colour: High Visibility Orange



Health & Safety

Hands at work are extremely vulnerable to a wide range of hazards which include cuts, blows, chemical attack and temperature extremes. With industry's increasingly complex and sensitive manufacturing and handling processes, there is a growing insistence on the use of "job fitted" gloves that meet each user's specific requirements; hence our offering of a wider and more comprehensive range of gloves in this section – in excess of 200 different types and styles from which to choose.

Maintenance

Contaminated and worn gloves may fail to protect the hands from the very hazard they were designed for. Effective protection is maintained by regular replacement of the gloves. Check the condition of the gloves, inside and out.



Buying Guide

European Standards

[C] Implies that the gloves comply with the basic requirements laid down by the EEC directive: Personal Protective Equipment.

Simple Design (Category 1)

For areas of 'minimal risk' where the effects of not wearing a glove are easily reversible or superficial. Such products are self-certified.

Intermediate Design (Category 2)

For areas of specific risk i.e. mechanical risks. Such products will have been EC type tested against European test methods and certified by a notified body.

Complex Design (Category 3)

For areas/applications that can seriously or irreversibly harm the health. Such products, in addition to the CE type test, will also have to be either produced under an approved quality system OR be type tested on an annual basis.



EN 388 – This standard applies to all kinds of protective gloves giving protection from mechanical risks, in respect of physical problems caused by abrasion, blade cut, puncture or tearing. This standard also covers risk of electrostatic discharge.



EN 374 – This standard specifies the capability of gloves to protect the user against chemicals and/or micro-organisms.



EN 511 – This standard applies to gloves which protect the hands against convective and contact cold.




EN 407 – This standard specifies thermal performance for protective gloves against heat and/or fire



EN 659 – This standard defines performance requirements for gloves designed to protect fire fighters against heat and flames.



EN 421 – This standard lays down test methods and performance criteria for gloves offering protection against ionising radiation and radioactive contamination.





If a glove is to be used for food handling, it is required to carry either the words 'for food use' or this symbol.



Mechanical Hazards: EN 388

		Performano Level
a)	Abrasion resistance	0-4
b)	Blade-cut resistance	0-5
c)	Tear resistance	0-4
d)	Puncture resistance	0-4



EN 511: Cold

		Performance Level
(a)	Convective cold	0-4
(b)	Contact cold	0-4
(c)	Water proofness	0-1
(-/		



Thermal Hazards: EN 407

		Performance Level
(a)	Burning behaviour	0-4
(b)	Contact heat	0-4
(c)	Convective heat	0-4
(d)	Radiant heat	0-4
(e)	Small splashes of molten metal	0-4
(f)	Large splashes of molten metal	0-4

Contact Heat

A sample is taken from the palm area of a glove. The outside of the glove is put on a hot surface and the temperature of the inside of the glove is then monitored. The temperature on the inside of the glove must take 15 seconds or more to rise by 10°C from room temperature.

EN 407 Performance Level		Threshold Time Seconds
1	100	>15
2	250	>15
3	350	>15
4	500	>15

Glove Chainsaw Dynamic Cut Protection Stihl

CONFORMS TO EN 166 1.F

- Individual lens angle adjustment
- Non-slip rubber arm grips
- Scratch-resistant lens

Colour: Clear lens, blue frame

304488 Code:



Oregon Chainsaw Protective Glove

CONFORMS TO EN 381-7

• Yellow hide palm with red nylon water repellent back and knitted cuff

Colour: S, M, L, XL 019346 Code:







KeepSAFE Nitrile Foam Coated Glove

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 4121

• Nitrile foam palm coating on a seamless nylon liner offering with exceptional dexterity and sensitivity

conditions

Grey Colour: 8, 9,10 Size: Code: 303008







KeepSAFE Grip Latex Coated Glove

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 2242

• Latex dipped cotton knitted gloves ideal for most sure handling tasks

Colour: Green 8, 9, 10, 11 Size: Code: 303026







KeepSAFE Grip Latex Coated Glove **©**

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 2242

• Latex dipped cotton knitted gloves ideal for most sure handling tasks

Size: 8, 9, 10, 11 Colour: Yellow Code: 303028



Honeywell



Honeywell Work Easy PU Coated Glove €

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 3121

- Polyester with a polyurethane coating provide excellent abrasion, tear resistance and good grip
- Tight knit gives perfect support, limits the penetration of dirt and offers a good touch
- Ventilated back & PU coating optimise breathability

Size: 8, 9, 10 Colour: Black **Code: 303057**



Honeywell



Honeywell Deerfit Thermal Glove CE

CONFORMS TO EN 388 AND EN 511 INTERMEDI-ATE DESIGN EN388 TEST RESULT: 2X1X

- Water-repellent suede grain leather glove sewn on thumb
- Thinsulate liner offers protection against cold temperatures
- Ideal for fork-lift operators and handling cold wet materials
- 2001610

Size: 7, 8, 9, 10, 11 Colour: Yellow Code: 303062







Turtle Skin Workwear Plus Puncture Resistant Glove **☑**

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 3243

- Ultra-comfortable leather work gloves specifically designed for tasks that require great grip, flexibility, and tactile sensitivity
- Patented blended aramid liner for added puncture protection in the palm area.

Size: S, M, L, XL, XXL
Colour: Black
Code: 303543



Welders Gauntlet

• Fully socked lined, self hemmed cuff, black welted

Colour. Red Size: Mens Code: 304002



KeepCLEAN Canadian Rigger Style Furniture Hide Glove

- Furniture cow hide glove supplied in colours as available
- Safety cuff with vein protection patch
- Normally supplied with palm patch
- Elasticated back Size: Men's Code: 304016



KeepCLEAN Canadian Rigger **Style Pig Split Leather Glove**

- Pig leather
- Safety cuff with vein protection patch
- Elasticated back
- Palm lined

Size: Men's Colour. Yellow Code: 304017





KeepSAFE Canadian Rigger Style Power Chrome Leather Glove

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 4143

- High quality Grey chrome leather
- Rubberised cuff with vein protection patch
- Elasticated back
- Palm lined

Colour: Grey Size: 10 Code: 304056







KeepSAFE Chrome Leather Red Cotton Back Rigger Glove

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 4143

- Premier quality chrome split leather
- Cotton back
- Knuckle and fingertip protection
- Rubberised safety cuff
- Palm lined

Colour: Red Size: 10 304057 Code:





KeepSAFE 'Gold' Canadian **Rigger Style Chrome Leather** Glove

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 3133

- High quality, shoulder chrome leather
- Elasticated back and lined palm

Size: 10 304072 Code:





KeepSAFE Fit and Grip Glove

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 114X

• High grip PVC lattice finish on a knitted base providing high levels of dexterity and grip

Colour: Orange Size: 10 Code: 304076



KeepCLEAN Cotton Stockinette Glove

• Standard quality knit wrist

Size: Men's Code: 304111



KeepCLEAN Cotton Stockinette Glove

• Standard quality open cuff

Size: Men's Code: 304112





Polyco Saturn Hi Vis **Insulated Glove**

CONFORMS TO EN 166 1.F

- High Visibility vinyl coating on an insulated liner is resistant to grease, oil, dirt and grime
- Keeps hands warm and dry with extra long knit wrist for comfort

Saturn Yellow 10 Size: 304194 Code:







KeepSAFE Long Nitrile Glove

CONFORMS TO EN 388 AND EN 374 COMPLEX DESIGN EN388 TEST RESULT: 4002

- 400 mm long with patterned grip and flock
- Offers dexterity and good abrasion resistance
- Resistant to animal fats, solvents and alkalis

Colour: Green

M, L, XL (8, 9, 10) Size:

304213 Code:











Marigold Industrial Heavyweight **Natural Rubber Gloves**

CONFORMS TO EN 388 AND EN 374 COMPLEX DESIGN EN388 TEST RESULT: 4121

- Unlined black natural rubber glove with high resistance to water based chemicals
- Ideal for use where heavy duty chemical protection is essential e.g. sandblasting, sanitation, chemical handling

Size: M, L, XL (8.5, 9.5, 10.5)

Colour: Black 304227 Code:





Polyco Nitri-Tech II Protective Glove CE

• Flock lined offering good abrasion resistance as well

as well as having anti-static properties to EN 1149

CONFORMS TO EN 388 AND EN 374 COMPLEX

DESIGN EN388 TEST RESULT: 4101










Keepsafe Cut Resistant Level 5 Nitrile Coated Glove **€**

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 4542

- Seamless high cut resistant (level 5) Glass Fibre/ Spandex/Synthetic mix yarn
- Nitrile coating on palm & fingers for increased resistance to oils & greases
- Soft finish provides exceptional cool comfort

Size: 8, 9, 10 Colour: Grey/Black 304272 Code:





part 1:1995

• 944/5/6/7 Size: 7, 8, 9, 10

Colour: Blue 304240 Code:





KeepSAFE Nitrile Glove CE

CONFORMS TO EN 388 AND EN 374 COMPLEX DESIGN EN388 TEST RESULT: 4002

Size: M, L, XL, XXL, XXXL

Colour: Green Code: 304291









KeepSAFE Heavyweight Rubber Glove Œ

CONFORMS TO EN 388 AND EN 374 COMPLEX DESIGN EN388 TEST RESULT: 3121

- Heavyweight rubber with flock lining and patterned grip
- Good resistance to knocks and abrasion make this an ideal glove for a variety of uses
- Food safe

Size: S, M, L, XL Colour: Black 304293 Code:











Polyco Leather Electricians Overgloves

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 3121

• For use with electricians gloves

7, 8, 9, 10 Size: Code: 304437





Polyco Electricians Gloves Class 0

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 3121

• RE0360/08/09,10/11 Working voltage 1000 volts AC • Tested to 5000v AC

Colour: Yellow 8, 9, 10, 11 Size: 304439 Code:





Clean Grip Disposable Nitrile **Powder-Free Gloves**

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 3133

- 100% nitrile approved for use with food preparation
- AQL 4.0

Colour: Blue S, M, L, XL Size: Code: 304667 Box of 100

Ansell



Ansell Hyflex PU Coated Glove

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 3121

- 11-618 An ultra-lightweight glove maximising touch and precision
- 20% lighter in weight than previous nylon/ polyurethane Ansell gloves for exceptional tactility
- Designed for assembly tasks requiring a high degree of precision, repeated flexing and pinching of the fingers and fingertips

Blue/Black Colour: Size: 6, 7, 8, 9, 10, 11 304591 Code:



Call the PPE Helpdesk (Details on Connect)

JUBA

JUBA Grip Latex Coated Glove

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 3142

- 251G Seamless design ensures good ergonomy
- Great dry and wet grip
- Not suitable to be used in oily surfaces or environments
- Excellent abrasion and superficial cut protection

Colour: Yellow/Green Size: 8, 9, 10 Code: 304709



JUBA

Knitted Kevlar Glove With Leather Palm Touchstone Ultra N

 Qualitative RPE Face Fit Test Kit for FFP1, FFP2, FFP3 filtering facepieces and half facemask respirators fitted with particulate or combined filters

Colour: Yellow/Green Size: 8, 9, 10 Code: 303209



clean

Clean Grip Disposable Latex Powder-Free Gloves

• 100% latex powder free approved for use with food preparation

Colour: Natural
Size: S, M, L, XL
Code: 304671

Box of 100







KeepSAFE Pick and Go Glove **ເ**€

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 2031

- Knitted polyester glove with blue PVC dots on palm and fingers
- Ideal for sorting operations and parts handling

Size: S, M, L, XL

Colour: White with Blue dots

Code: 304864







KeepSAFE PVC Lightweight Glove CG

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 4121

- Fully coated knitwrist
- Smooth finish
- For general handling
- Flexible, good sensitivity, comfortable in use
- Good dry grip

Size: 8, 9, 10 Colour: Red **Code: 304930**




Call the PPE Helpdesk (Details on Connect)

Gloves Size Guide

Glove Sizing

If gloves are uncomfortable, they won't get worn. Ensure you have the right glove fit by using our handy size guide below.

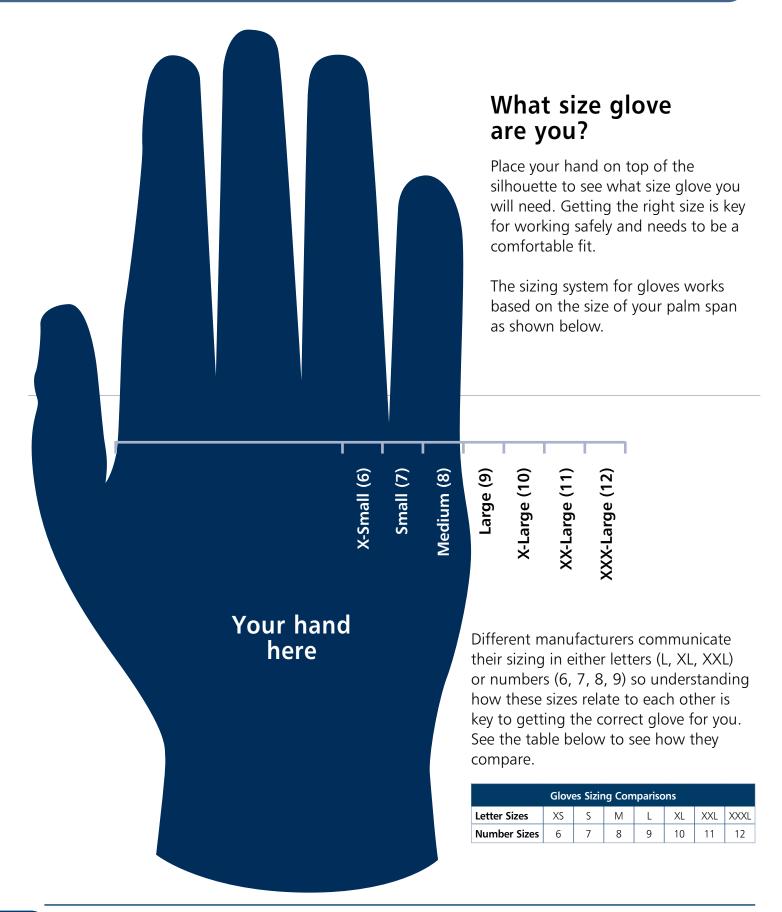



Safety Footwear

Health & Safety

Legislation

EN ISO 20345:2011 is the current standard to which new and recently certified footwear has to conform (whilst stock rotates some safety footwear may have been tested to the previous standard). The standard to which the footwear conforms will be identified on the product information label within the footwear.

The standard requires the inclusion of a 200 joule toecap for impact protection. In addition to the over arching requirements of the standards there are a number of progressive ratings which assist selection of footwear appropriate for varying workplace hazards, these are:

- SB safety basic footwear meeting all the minimum requirements of the standard
- S1 additionally featuring anti-static properties and fully enclosed and energy absorbing heel unit

- S2 additionally featuring the use of water resistant leather
- S3 additionally featuring cleated outsole and pierce resistant midsole
- S4 rubber or polymeric waterproof footwear with 200 joule toecap, anti-static properties and energy absorbing heel unit
- S5 additionally featuring cleated outsole and pierce resistant midsole

Additional protective features can be built into the footwear and are identified by the following suffixes:

 P – protection from upward penetration provided by a composite or steel midsole (not used in conjunction with S3 or S5)

- M metatarsal impact protection
- C conductive properties helping to prevent the build-up of static (but no protection against electric shock)
- A anti-static properties to prevent the build-up of static and give limited protection against electric shock from nominal mains voltage
- HI insulation against heat
- CI insulation against cold
- E energy absorption in heel unit
- WRU water resistant uppers
- HRO resistance to hot contact up to 300°C

Buying Guide

Choose the right footwear

Most workplaces have varying requirements for the provision of safety footwear, which is why we offer a comprehensive range within which you should be able to identify appropriate footwear to meet the needs of your workforce whatever the hazards identified in your risk assessment.

Whilst protection is paramount it is recognised that with long wear periods, often in hostile conditions, wearer acceptance, design, brand and comfort are additional considerations. We therefore offer varying styles from executive shoes to heavy duty rigger boots, and leading brands such as CAT, Timberland, Dr Martens, RockFall, U-Power, Goliath & Dunlop alongside our increasingly popular and cost effective Tuf Revolution and Tuf ranges.

Slip Resistance

Slips, trips and falls are an ever present hazard within most workplaces and safety footwear can play it's part in preventing injury, particularly from slips, by featuring slip resistant soles.

For many years the test of choice for slip resistance has been SATRA's TM144 standard which evaluates the performance of the sole unit on a water wet quarry tile. Well established styles of footwear are likely to have been tested to TM144 and will be identified as such by the TM144 icon.

However with regard to new styles or footwear undergoing periodic re-testing the recently established EN ISO 13287 with it's progressive SRA, SRB and SRC ratings has become more widely used.

Details of the EN ISO 13287 testing requirements are shown in the table below:

Slip resistance ratings for industrial PPE footwear in Europe Marking symbols and specifications Minimum coefficient of friction by ISO 13287:2006 Footwear slip Marking resistant on Forward flat slip Forward heel slip Ceramic tile with 0.5% SRA 0.28 0.32 SLS solution Steel with 90% glycerine SRB 0.13 0.18 Both the above on respective Both the above on respective SRC Both the above NB: ISO 13287:2006 is identical to EN ISO 13287:2007

Footwear tested to EN ISO 13287 and the rating achieved will be identified by the appropriate SRA/SRB/SRC icon.

Sizing

Safety footwear often carries European sizing, please see below for a comparison table.

Shoe Size Conversion Table

This table is for guidance only as sizes are not standardised

British 2 3 4 5 6 7 8 9 10 11 12 13 Continental 35 36 37 38 39 41 42 43 44 46 47 48

Maintenance

As with all footwear it is essential that, to achieve optimum performance of the properties built in to the safety footwear at time of manufacture, safety footwear is cleaned and maintained regularly.

Safety Icons Key



Denotes footwear with safety toecap



Denotes waterproof footwear



footwear with safety midsole



Denotes TM144 rating



Denotes water repellent footwear



Denotes SRB rating



Denotes footwear suitable for women



Denotes SRA rating



Denotes footwear with anti-static soles



Denotes SRC rating

Safety Footwear





Goliath Poseidon GORE-TEX® Leather Firefighter Safety Boot @

CONFORMS TO EN 20345:2011 200 JOULES S3

- Full grain leather upper with padded collar
- Contoured triple layer footbed
- Non woven top layer made of 100% polymide fibres and is highly abrasion resistant both wet and dry
- Mid layer is black PU air permeable foam with open cell construction
- It is of high density for good cushioning support
- The bottom layer includes 30% viscose giving extra moisture absorption and desorption properties
- Antibacterial, removable and washable at 30 C
- Stainless steel pierce resistant midsole

4-13 (Full sizes only)

Colour: Black Code: 100134









Tuf Safety Wellington Boot with Midsole @

CONFORMS TO EN 20345:2011 200 JOULES S5

- PVC with PVC/nitrile sole
- Ribbed heel with kick off tab to assist removal
- Oil, acid, alkali and fat resistant
- Pierce resistant steel midsole

3-13 Full sizes only) Size: Colour: Black with Black sole

Code: 165022





Uvex 9598-2 Hydroflex Inlay Soles €

CONFORMS TO EN 20345:2011 200 JOULES S3

- Breathable natural cork footbed
- Active coal stops foot odour
- Antistatic
- Uvex hydroflex® GEL for optimal shock absorption in heel area
- Wffective ventilation system
- Comfortable underfoot

Size: 3-13 (Full sizes only)

Code: 170005





Endurance Thermal Seaboot Stockings **Œ**

• 55cm (22") seaboot hose, containing 50% thermal fibre and 50% wool

• Ultra warm

Colour: White Code: 364026





Bama Thermal Insole CC

4-12 (Full sizes only) Size:



Respiratory Protection

Health & Safety

Legislation Update Amended Standard En 149:2001+A1:2009

EN 149:2001 was superseded by an amended version, EN 149:2001+A1:2009 (EN 149+A1) in July 2009. Changes included the introduction of two usability classifications for disposable respirators; single shift only devices non-reusable (shown through marking "NR") and reusable devices (marked 'R').

The amended European Standard EN 149:2001+A1:2009 states that all reusable devices (marked 'R') must withstand being cleaned and disinfected using a method provided by the manufacturer. This change, along with new performance requirements, is intended to give the user further confidence in respirators providing continuous respiratory protection in hazardous environments.

All particle filtering half masks featured fully conform to EN 149:2001+A1:2009.

Disposable respirators that have passed the optional Dolomite clogging test have a suffix **'D'** listed in their conformity standards.



Buying guide

Selecting the correct protection

The selection of Respiratory Protection follows a basic four-step method:

- Identify the hazards dust, metal fume, gas, vapour
- Assess the hazards assess the hazard level/other protection skin and eye
- Select the proper respirator disposable, half mask, full face, powered, airline
- Training in fitting and use to optimise respiratory protection

Respiratory Hazards











METAL FUMES

DUSTS

GASES

MISTS

VAPOURS

Did you know?

Approximately 5.5million workers are exposed to respiratory hazards in the work place and research by both BSIF and HSE has highlighted concerns that RPE is not being effectively selected, used and maintained in a significant proportion of workplaces where a respiratory hazard exists, leaving workers at risk.





Are you **FULLY PROTECTED?**

Do you...

- Use the right mask?
- Use the right filter?
- Replace filters when required?
- Store and clean it properly?
- Maintain the product properly?
- Fit it properly?

Have you...

- Been trained how to use it?
- Been Fit Tested by a competent person?

If you answered **NO** to any of the above, your respirator **WON'T** protect you!

Respiratory Protection



KeepSAFE Elipse Half Mask with P3 Filters

EN 388 AND EN 374 COMPLEX DESIGN EN388 TEST RESULT: 4121

- Perfect for everyday use in construction and utilities through to the more demanding environments of metalworking, welding and stone masonry
- Twin filter ready to wear half mask
- Latex and silicone free
- Lightweight TPE face piece that is comfortable to wear for long periods of time
- Low profile filters provide unobstructed field of vision
- Suitable against silica dust
- Weighs less than 135g with filters

Size: S/M, M/L **Code: 292261**



Elipse P3 Storage Case

• For use with KeepSAFE Elipse Half Mask Respirator

Code: 431536





KeepSAFE Elipse P3 Construction Dust Replacement Filters

• For use with KeepSAFE Elipse Half Mask Respirator





3M™ Aura™ 9332+ Flat-Fold Valved Dust/ Mist/Metal Fume Respirator

CONFORMS TO EN 149:2001 FFP3 NR D

- Unique 3-panel design, soft cover web for comfort and excellent fit
- 3M[™] Cool Flow[™] valve
- Individually packed, flat fold
- Assigned Protection Factor = 20

Code: 292747

Box of 10



Economy Disposable Valved Respirator FFP3

- Protection against vinyl fire toxic Dusts, Fibre & Aqueous Mists protects against oil mists welding fumes (not nitrate gases) and microbiological hazards for use in Pharmaceutical iron & steel and construction industries
- Exhalation valve lessens heat build up and provides greater comfort
- Assigned Protection Factor = 10

Code: 290035 Box of 5



Ways to Order:

Respiratory Protection



JSP FORCE8™ Respirator With Ready Fitted Press-To-Check Construction Dust **C**€

MASK CONFORMS TO EN140, FILTERS CONFORM TO EN143

- Respirator Force 8 Half Mask includes With Press To Check™ P3 Construction Dust Filters Ready Fitted
- The mask is made with a durable thermoplastic rubber offering a superior fit to most face shapes
- The mask accepts the full range of low profile Force8™ filters, offering the flexibility to be used for many applications, providing filtering protection against particulates, many gases and vapours

Code: 292306



3M

3M™ FT30 Face Fit Test Kit (Bitter)

- Qualitative RPE Face Fit Test Kit for FFP1, FFP2, FFP3 filtering facepieces and half facemask respirators fitted with particulate or combined filters
- Each kit contains a hood and collar assembly, two nebulisers, one bottle of sensitivity solution, one bottle of fit test solution, detailed user instructions and CD ROM, spare atomiser heads for the nebuliser and a pin for unblocking nebulisers

Code: 290129



3M

3M Versaflo M-307 Headtop

CONFORMS TO EN12941 TH3 (APF 40) WITH THE 3M VERSAFLO TR-300 AND TR2 (APF 20) WITH THE JUPITER TURBO UNITS EN 14594 3B (APF40) WITH THE 3M AIRFED BELT UNIT

- For respiratory, eye, face and head protection
- Features a flame resistant faceseal for applications with hot particles

Size: S/M, M/L **Code: 277353**



3M

Welding Helmet Air Powered Speedglas for Adflo Respirator

- The 3M Speedglas 9100FX Series Welding Shield features a flip-up combination of an autodarkening welding shield and a protective visor
- Greater coverage of the ears, neck and sides of the head
- Great stability and balance of the shield as a result of its lower pivot point






Buying Guide

Anti-mist? Anti-scratch? Does your eyewear reach the standard?

"K" and "N" are coating treatments that reach the standard set by EN166. It's easy how to find out, you just look for the "K" (anti-scratch) and "N" (anti-mist) on the lens of your safety glasses, goggles and face shields.

By EN law all safety eyewear needs to be marked on the lens. If the lens doesn't have "K" or "N" marked on, then they do not reach the required standard.

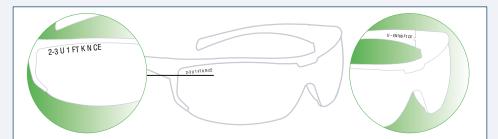

K = Anti-scratch treatment applied to the surface of the lens whose hardness is a barrier against superficial damages that can impair vision. The coating is permanent and it offers performance to the standards required by EN166

N = Anti-mist treatment, which, due to its chemical and physical abilities, prevents the formation of condensation by absorbing the humidity drops. The coating is permanent and it offers performance to the standards required by EN166

Safety Icons Key

We have developed a new range of safety icons and tables to help you compare and find the right eye protection.



Anti Scratch



Anti Mist



Anti Scratch K



Anti Mist N



Impact Protect

European Standards EN 166

To assist you in your understanding of markings on Eye Protection Products covered by this Standard you should note:

Optical Standard: Class 1: For continuous work Class 2: For intermittent work Class 3: For occasional work, but must not be worn continuously	Frame - - -	1 2 3
Mechanical Properties: Increased Robustness (General Purpose) High Energy Impact (190m/sec) Medium Energy Impact (120m/sec) Grade 1 Low Energy Impact (45m/sec) Grade 2 Increased Robustness – General Purpose Impact-Performance at Extremes of Temperature	- A B F T	S A B F T
Areas of Use: Liquids (chemical) Large Dust Particles Gas and Fine Dust Particles Short Circuit Electric Arc Molten Metals and Hot Solids	3 4 5 8 9	- - - - 9
Optional: Resistance to Misting/Fogging Resistance to Mechanical Damage (Anti-Scratch)	-	N K

NB: The "A", "B", "F" and "S" markings on frame and lens represent tests carried out on each component and therefore may be different – in which case the lower level must be assigned to the complete unit when making an assessment.

EN 169	Welding Filters
EN 170	Ultra-Violet Filters
EN 171	Infra-red Filters
EN 172	Solar Protection Filters for Industrial Use
EN 175	Welding Work Equipment
EN 207	Laser Protection Eyewear
EN 208	Laser Adjustment Eyewear



- Lightweight safety spectacle, 25g
- Wraparound 9 base curve polycarbonate lens
- Co-injection moulded temples with soft rubber to increase grip and provide excellent comfort levels
- Optical Class 1 lens, blocks 99.9% of ultraviolet radiation
- UVA, UVB and UVC protection

• Conforms to EN166.1.F.N. Tested to resist the impact of a 6mm () steel ball fired at 100mph (160kph) at the lens

Colour: Clear Lens Code: 293180 (A) Colour: Smoke Lens Code: 293181 (B) Colour: Amber Lens Code: 293182 (C) Indoor/Outdoor Lens Colour:

Code: 293183 (D)











3M 2740 Safety Spectacles

CONFORMS TO EN 166 1.FT AND EN 170

- Combines a modern design with various adjustment options leading to increased protection and comfort
- Polycarbonate lens with scratch resistant and anti-mist coatings
- Adjustable temple length and adjustable lens angle
- Soft temple tips reduce pressure

Colour: Clear anti-mist, anti-scratch

lens, Blue arms

Code: 292074



Α







KeepSAFE Concorde Safety Spectacles

CONFORMS TO EN 166 1.F

- Ultra lightweight modern style with blue nylon adjustable length
- Polycarbonate single lens construction with built in browguard

Colour: Clear lens, Blue sidearms























Bolle Silium Safety Spectacles Clear Lens

CONFORMS TO EN 166 1.F AND EN 170

- Sleek sports metal provides the wearer with optimal protection
- Panoramic vision with integrated side shields
- Self adjusting spring temples
- Soft adjustable nose pads and Bolle's 'Tip Grip' system for improved fit

Clear anti scratch/anti mist lens, Silver frame



Bolle Silium Safety Spectacles Smoke Lens

CONFORMS TO EN 166 1.F AND EN 170

- Sleek sports metal provides the wearer with optimal protection
- Panoramic vision with integrated side shields
- Self adjusting spring temples
- · Soft adjustable nose pads and Bolle's 'Tip Grip' system for improved fit

Smoke anti scratch/anti mist lens, Silver frame Colour:

Code:



















Bolle Spider Safety Spectacles with ESP Lens

CONFORMS TO EN 166 1.F EN 170 AND EN 172

- Trapezoid lens shape guarantees extra field of view
- Lightweight nylon frame with integrated side shields
- TPE inserts on both the bridge and temples provides exceptional levels of comfort and fit
- Supplied with a free micro fibre pouch

Colour: ESP anti scratch lens, Bronze frame

Code:





Bolle Silium + Safety Spectacles K & N Rated

CONFORMS TO EN 166/EN 166/170/172 1FT KN

- Lightweight- 21g
- Flexible close-fitting sports wrap
- Non-slip sports temples
- Adjustable non-slip bridge

Colour: Clear anti-scratch/ anti-mist lens

Code: 292911 (CLEAR)

292912 (SMOKE)





JSP EVOSPEC® (CE

CONFORMS TO EN 166

• Easy assembly kit for adding retractable eyeshields to an existing EVOLite® helmet

Ways to Order:

Colour: Clear Code: 254500 Colour: Smoke Code: 254501





CONFORMS TO EN 166 1.B.3.9

20cm (8") bound Size: Code: 254261











Bolle Atom Safety Goggles

CONFORMS TO EN 166. 1BT 3,4,5

- Compact, lightweight and ultra comfortable
- TPR flexible frame
- clear anti-scratch and anti-mist lenses offer a
- Wide field of view
- Wide adjustable strap adds to the comfort
- Fits over prescription spectacles
- Prescription insert is also available
- Tear off lens protectors

Colour: Clear anti-mist, anti-scratch lens, Blue frame

293002 Code:

Bolle Atom Safety Google Visor 🖾

CONFORMS TO EN 166 B

When the optional face visor is fitted the Atom doubles up as a face shield

293004 Code:





3M Speedglas 9002D Auto Darkening **Welding Filter**

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 3121

- Suitable for MMA and MIG welding (plus TIG welding down to 20 Amps)
- Shades 9 or 11
- Light shade 3
- Viewing area 44x92mm
- Two sensitivity options

Code: 277212



3M Speedglas SL Welding Sheild with Shade 8-12 Lens

CONFORMS TO EN 388 INTERMEDIATE DESIGN EN388 TEST RESULT: 3121

- The Speedglas SL welding shield is made from strong, lightweight material with excellent protection
- Unlike other materials that can absorb moisture and become heavy, the Speedglas SL shield is non-absorbent, so it retains its performance in high humidity
- Using new liquid crystal designs and manufacturing techniques, we are able to make the Speedglas SL auto darkening welding filter much lighter

than other models but with the same outstanding optical quality and switching performance

- · For most arc processes such as MMA, MIG/MAG, TIG and plasma welding
- Variable (8-12) dark shade
- 4 sensitivity settings
- Battery life: 1500 hours

Weight: 360g Code: 277250



CENTURION

Centurion Polycarbonate Faceshield

150mm Size: 272470 Code:



CENTURION

Centurion S59 Forestry Mesh Visor

Size: 150mm (6") Code: 290320





Bolle Rigid Spectacle case

• Large polyester spectacle case complete with belt loop for convenient storage

292996 Code:





Bolle Microfibre Spectacle Case

• Manufactured in microfibe with drawstring closure

Code: 292993





Spectacle Neck Cord

• Black lanyard spectacle cords

Code: 292885

Pack of 6





Buying Guide

Identifying Hazards

A safety helmet is required in almost every industry where there is a risk of being injured by falling objects. In areas of restricted head space where accidental bumping of the head could be involved (e.g. overhead piping) a scalp protector (bump cap) should be considered. Bump caps are not a substitute for safety helmets and must not be used to protect the head from falling objects.

Identifying Materials

Shells are primarily made using UV stabilised high density polyethylene (HDPE) or ABS (Acrylonitrile Butadiene Styrene). Harnesses are made using low density polyethylene or textile webbing.

Care and Maintenance

A helmet may be cleaned with soap and water, drying with a soft cloth. A helmet should not be cleaned with abrasive substances or solvents and must not be stored in direct sunlight or in contact with chemicals. The wearer should inspect their helmet regularly. Any helmet showing more than superficial abrasions or scuffing to the shell should be replaced.

Shelf Life

To comply with European Standards, all helmets are marked with the quarter or month and year of manufacture. If helmets are stored in boxes in which they were supplied and do not experience environmental extremes, the shelf life of a helmet is not limited. However, it is not recommended that a helmet should be in use five years after date of manufacture.

So What Are The Differences?

A helmet is not just a helmet. They have many different features providing specific user benefits,

- Weight: Some helmets are lighter than others.
 A lightweight helmet may provide more comfort during prolonged periods of use
- Cradle: A helmet can have either a basic polyethylene cradle or a more comfortable textile webbing cradle

- Sweatband: A helmet can have either none, a standard or a high absorbent sweatband for improved comfort during use
- **Ventilation:** Some helmets are ventilated, providing cooling airflow during use
- Badging: Some helmet designs allow for a larger front badging area, for an enhanced corporate image
- Peaks: Peak lengths can vary a reduced peak is available for improved upward visibility
- Retro-Reflective Surfaces: Reflective surfaces that provide greater visibility of the wearer in low light conditions

European Standards

EN 397 specifies physical and performance requirements of industrial safety helmets. Certain tests are mandatory if the product is to receive EN 397 approval.

These cover:

- Shock absorption
- Flame resistance
- Resistance to penetration
- Chin strap anchorage

A manufacturer can choose to submit his products to additional optional tests. Such tests could lead to one or more of these markings appearing on a helmet.

-20°/-30°C The helmet will provide some protection when worn in an environment at or above this temperature. -40°C ultra low temperature (outside of FN 397)

440V a.c. The helmet will protect against short-term, accidental contact with live electrical conductors up to this voltage

LD The helmet will provide some resistance to lateral compressive (non-impact) loads

MM Molten Metal splash test

EN 14052 Builds on EN 397 to include more onerous tests and requirements, but also to include requirements for additional impact protection to the front, rear and sides of the head. It also includes performance tests for the retention system (typically headband and chin strap), not typically included in EN 397.

EN 50365 Electrically insulating helmets for use on low voltage installations

EN 812 Is the standard for Industrial Bump Caps, which are intended to provide protection against bumps caused by walking into hazardous projections. A Bump Cap does not provide protection against falling or thrown objects and should not be used where a safety helmet is required

EN 12492 Helmet for Mountaineers



JSP Surefit Polycarbonate Visor

Offers protection against medium energy high-speed particles and liquid drops

Size: 20cm (8") unbound

Code: 254272

Mosquito Head Net

- Ultra fine mesh for high level protection
- 100% polyester fabric for a comfortable feel
- One size fits all so anybody can use it
- NATO approved

• No chemicals making it ideal for sensitive skin

Code: 883703



CENTURION

Connect Polycarbonate Chinguard S91C

Code: 272448



CENTURION

S54 Connect Face Screen Carrier

- Supplied complete with clips for attaching to the helmet
- Flip-up facility
- Accepts all Centurion Connect face screens
- Can be used in conjunction with Connect ear muffs
- Comes complete with Connect clip

Code: 272469





JSP Surefit Wire Gauze Visor

• Forestry wire gauze Size: 20cm (8") Code: 254274





KeepSAFE Thruxton Visor Carrier Only

• Surefit visor carrier supplied without visor

• To fit JSP Mk7 and KeepSAFE safety helmets

Code: 254304







Chamlon Sweat Band CE

- For EVO Range helmets
- Chamlon Egyptian cotton core with porous PU coating for maximum sweat absorption
- PH neutral, dermatologically tested





Surefit Evo Visor Carrier

• To fit JSP EVO safety helmets

• Supplied without a visor

271215





Evolite Helmet Clips

• Pack of 4 clips

• To securely attach head lamps and googles to an EVO2®, EVO3®, EVO6100® and EVOlite® Safety Helmets

271216 Code:

Pack of 4





Surefit Deluxe Chin Strap And Chin Cup

- To fit JSP helmets meeting the requirements of EN397
- Releases automatically with forces between 150 and 250 Newtons

271219 Code:





Surefit Elasticated Chinstrap Without Chin Cup

• To fit JSP and Keepsafe helmets meeting the requirements of EN397

Code: 271300





JSP Mk VII Safety Helmet With Lamp **Bracket and Network Rail Logo**

- Terylene webbing harness with fully absorbent leatherette comfort band
- Ventilated
- Easyjust harness adjustment system
- Fitted with international slots to add Surefit or other manufacturers helmet accessories
- WITHOUT RETROPEC

White Colour: Code: 272050





Petzl Vetex Best Safety Helmet with Network Rail Logo

- Designed specifically for working at height
- Polycarbonate shell is resistant to wear and impacts
- Side slots allow for mounting eye/ear protection
- The adjustment wheel & cradle allow quick and easy fitting
- Strong chin strap reduces the risk of the helmet coming off during a fall
- Shell conforms to EN397 (Industrial safety helmet standard)
- Strap conforms to EN12492 (Mountaineering standard)

Colour: Yellow Weight: 465q 272113 Code:





JSP Evolite Vented Safety Helmet With Network Rail Logos

- The low weight, and unique 3D Adjustment supreme comfort harness make this the most comfortable helmet on the market
- Performing above the EN397 standard thanks to its ABS lightweight shell

Size: White Weight: 285g Code: 272391





JSP Evolite CR2 Reflective Safety Helmet

- The lightweight EVOLite® CR2 features a Class R2 reflective sticker decal which meets the Class R2 reflective requirements of EN12899-1, over 50% more reflective than high visibility clothing reflective requirements
- EVOLite® CR2 is the biggest step-up in night time visibility/reflectivity of head protection to date

Colour: White Size: 53-64cm Code: 272392





JSP MK 7 Leatherette Spare Sweatband

 Surefit leatherette sweatband for JSP Mk7® safety helmets

Code: 290427



CENTURION

S31N Connect Nylon Sweatband

• Brushed Nylon sweatband for improved comfort

Code: 272409



CENTURION

Centurion Concept Linesman Helmet with Network Rail Logo

- Reduced peak helmet with four point security head harness with quick release buckle
- Ideal for working at heights (electrical/utilities)

Colour: White Size: 51-63cm Code: 272417



CENTURION

Weight: 150mm (6") **Code:** 290320



PELTOR

Peltor G2031A Hard Hat Syster

- Complete system of safety helmet, face shield, Ear muffs and rain shield
- Ear muffs equipped with wide cushions provide reduced surface pressure and excellent seal against the head

Colour: Orange Weight: 660g Code: 272506





Railway Helmet Warmer

- High visibility
- Full head and face comforter
- Meets EN471 GO/RT 3279 requirements
- For JSP and Keepsafe helmets
- For use in rail industries

Colour: High Visibility Orange

Code: 271346





JSP Safety HardCap A1+

- Reflective piping
- Ventilation holes in liner plus mesh panels
- Unique adjuster
- Sweat band

Colour: High Visibility Orange

One Size Size:

279015 Code:





JSP EVOLite Standard Peak Vented Safety Helmet with Chinstrap and **Network Rail Logo**

CONFORMS TO EN397 & EN50365 10KV

- 6-point terylene cradle harness system
- Egyptian cotton core with porous PU coating for maximum sweat absorption
- 3D Precision Fitting
- OneTouch[™] Slip Ratchet

Colour: White Code: 271047





JSP EVOLite Standard Peak Vented Safety Helmet with Chinstrap and **Network Rail Logo**

CONFORMS TO EN397 & EN50365 10KV

- 6-point terylene cradle harness system
- Egyptian cotton core with porous PU coating for maximum sweat absorption
- 3D Precision Fitting
- OneTouch™ Slip Ratchet

Colour: Blue 271048 Code:





JSP EVOLite Reduced Peak Vented Safety Helmet with Chinstrap and **Network Rail Logo**

CONFORMS TO EN397 & EN50365 10KV

- 6-point terylene cradle harness system
- Egyptian cotton core with porous PU coating for maximum sweat absorption
- 3D Precision Fitting
- OneTouch™ Slip Ratchet

White Colour: Code: 271049





JSP EVOLite Reduced Peak Ven Safety Helmet with Chinstrap **Network Rail Logo**

CONFORMS TO EN397 & EN50365 10KV

- 6-point terylene cradle harness system
- Egyptian cotton core with porous PU coa for maximum sweat absorption
- 3D Precision Fitting
- OneTouch™ Slip Ratchet

Colour: Blue Code: 271050



PVC Protective Neck Cape

- Provides splash protection from liquids
- When combined with visor and boilersuit gives full body protection
- Simple retrofit to helmet harness

Green Colour: Code: 271252



Skull Cap Helmet with Breathable Liner

Colour: Black 014540 Code:





Hearing **Protection**

Health & Safety

The Law

Employers are required to comply with the Control of Noise at Work Regulations 2005 which aim to ensure that employees' hearing is protected from excessive noise at their place of work.

The HSE guidance states that the hierarchy of control should begin with reducing noise through engineering means and other controls (e.g. segregation of activities). Where hazardous levels of noise remain present, Hearing Protective Equipment (HPE) may be used to further reduce exposure.

Where average noise levels are 80 decibels (dB) or above, an employer is required to assess the risk to employees, make hearing protection available and provide their employees with relevant information and training. 3M™ HPE which provides low attenuation is identified by green and yellow coloured symbols.

At 85dB and above the provision of suitable HPE is

mandatory. When HPE is worn, employees must not be exposed to noise above 87dB. 3M™ HPE which provides medium-high attenuation is identified by red

For more information visit www.hse.gov.uk/noise.

What to look for

The attenuation table supplied with each hearing protector provides the assumed protection at different frequencies. They also feature H, M and L values which stand for High, Medium and Low and relate to how the equipment performs at high, medium and low frequencies. They will also have a Single Number Rating (SNR) which provides an indication of the performance averaged over the full frequency range.

The attenuation of HPE selected must be high enough to reduce exposure to noise to acceptable levels but not so high that the wearer becomes isolated and unable to communicate or hear warnings.

Rule of Thumb

When it's necessary to raise your voice to have a conversation when 2m apart, the noise level is likely to be 85dB or above

SNR (Single Number Rating)


SNR is the number of potential decibels the hearing protection will reduce the noise level by, if fitted correctly. The aim is to find a suitable product that brings noise level down to between 70 and 80 decibels. Over protection should also be avoided, as people may not be able to hear important every day sounds. SNR is only a general means of comparing different sound protection levels for different hearing protection.

Target noise in the ear = 75dB to 80dB. Noise level = 100 dB. SNR value of product = 25dB In the ear noise = 75 dB. Target met. <



Buying Guide

Identifying noise hazards and assessing noise levels in the workplace is the first step towards ensuring your workforce is protected.

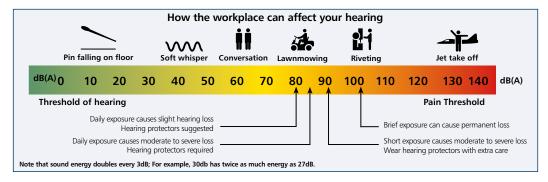

Assess your needs

The HSE website contains good information on assessing risk.

See www.hse.gov.uk/noise/risks.htm. When a noise survey is required, it must be carried out by a competent person such as a noise consultant or specialist. In-house measurement may be undertaken by appropriately trained and experienced staff using a range of reliable sound level meters and associated software.



< 85dB(A)

You do not have to wear hearing protection, but make it available to your workers.



83 dB(A) - 93 dB(A) You are above the permitted exposure level, hearing protection is compulsory above 85



87 dB(A) - 98 dB(A) You are above the permitted exposure level, hearing protection is compulsory. Ideal for high frequency noise.



94 dB(A) - 105 dB(A) You are above the permitted exposure level hearing protection is compulsory. Ideal for high and medium frequency noise.



95 dB(A) - 110 dB(A) You are above the permitted exposure level, hearing protection is compulsory. Ideal for all frequencies

Noise Thermometer

Sound Energy Doubles Every 3dB

Apollo Lift-off 188dB
Immediate physical damage
Jet Engine Take-off 150dB
Maximum allowable exposure
Impact Drill 130dB
Immediate pain threshold
Oxygen Torch 121dB
Short exposures at this level may cause hearing damage
Impact Wrench 102dB
Extremely loud
Forklift 87dB Protection MUST BE PROVIDED above this level
Hand Saw 85dB Protection recommended for 8-Hour exposures above this level
Vacuum Cleaner 74dB

Hearing Protection



KeepSAFE Blue Cyclone Ear Muff

• Good, effective protection across a wide range of noise frequencies with acoustic foam fill

• Suitable in manufacturing industries, agriculture, construction sites, food industry and engineering

Size: Blue Weight: 300g Code: 254199



3M

3M Peltor Optime II H520B Neckband Ear Muff

- Features optimum attenuation also at lower frequencies
- Wide cushions provide optimum seal against the head
- Ideal for agricultural use, mining, construction equipment, heavy industry and airports

Colour: Black Weight: 195g Code: 254137



3M

3M Peltor Optime III H540B Neckband Ear Muff

- Reduced peak helmet with four point security head harness with quick release buckle
- Ideal for working at heights (electrical/ utilities)

Colour: Black/Red Size: 270g Code: 254330



Hearing Protection




KeepSAFE Thruxton Ear Muff

CONFORMS TO BSEN 352-3 H= 31 M=23 L=16 SNR=26

- To fit Keepsafe comfort plus & standard Mk2 helmets Using the CliptiteTM slot
- When not in use the arms allow the cups to stand off clearly from the head
- SNR 26

Code: 254303

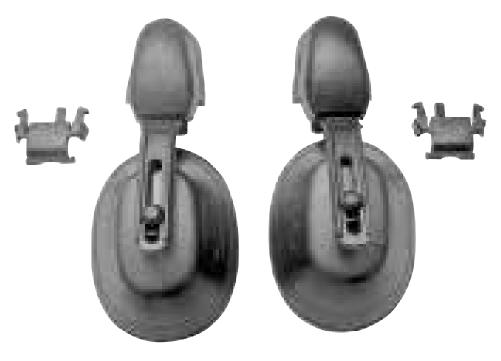



Surefit Contour Ear Muff

- To fit JSP EVO & Mk7 helmets
- Spring loaded arms with international slot that give an excellent fit to the ear
- When not in use the arms allow the cups to stand off clearly from the head
- SNR 28



Fall Arrest



Capital Safety Full Body Harness

CONFORMS TO EN361 & EN358

• Harness can be precisely adjusted to the user's shape by means of buckles on the chest, thighs and shoulder straps

• Light materials decrease the weight that is supported throughout the day and also reduces worker fatigue

Supple dorsal pad providing a more comfortable fit

• Larger attachment "D" rings for easier attachment

 Labels are protected by a speciallydesigned guard, giving a longer life for the harness

 Quick-Connect buckles for practical, rapid and simple fitting of the harness

Size: Medium/Large Colour: Black/Red Code: 801105





Capital Safety Positioning Trigger

CONFORMS TO EN358

- Unrivalled level of control over the length of the lanyard
- Effortless shortening of the lanyard
- Quick connection/disconnection by double action snap hook connector
- Connection of the trigger device by a lightweight aluminium twist-lock karabiner
- Highly resistant robe protection sleeve

Code: 801107





Capital Safety Anchorage Sling

CONFORMS TO EN795:2012 CLASS B & EN566:AND AT THE HARMONIZED STANDARD N°: 2007 & EN354:2010

Webbing

- Red polyester
- Width 25 mm

System breaking

 strength:
 22kN

 Net weight:
 200g

 Code:
 801108





Capital Safety Shock Absorbing Lanyard

CONFORMS TO EN355

Absorbing element

- Tear strap polyamide
- Security polyester webbing width = 45 mm
- Impact force reduction < 6 Kn

Webbing

- Polyester
- Width 25 mm

Sewing

• Thread high strength polyamide

Karabiners

- \bullet Strength (A) > 2500 daN (B) > 2200 daN
- Opening (A): 17 mm (B): 60 mm
- (A) forged steel white electro-zinc-plated
- (B) forged alloy polished
- System breaking strength: >1500 daN



Site Equipment

VARTA

Varta LED x4 Head Light

- Pivoting water-repellent head
- Adjustable head strap
- 3 Position slide switch
- 3x white LED
- 1x red LED for night vision
- Supplied with 3 AAA batteries

Weight: 100g Code: 764059



VARTA

Varta Industrial 2D Cell Weather Resistant Rubber Torch

- 16604
- Durable high-performance shock proof torch
- Prismatic reflector
- Weather resistant
- 3 Positions focusing, spot to flood and handle with clip
- Resistant to chemicals like common industrial solvents, gasoline, oil, diesel fuel
- Requires 2xD type batteries (not included)

Colour: Yellow **Code: 764005**



Small Clips for Petzl Headtorch Helmet set of 4 E04350 (CSP)

Code: 764038



CONTRACTOR

Contractor All Purpose Lamp

- Fitted with Krypton bulb that is 70% brighter than a vacuum bulb
- Patented frensel lens focuses light to maximise brightness
- Shatterproof case
- Recessed easy to use push button switch
- Easy grip handle
- Water resistant seal
- Requires 4R25 (996 type) 6v battery (not supplied)



LED LENSER®

LED Lenser HR7.2 Rechargeable LED Head Torch

- H7R Rechargeable Torch
- 3 x AAA Ni-Mh batteries included
- Max Watt 3.
- Power supply 3 x AAA alkaline batteries included
- Effective range: 160m
- Battery life: 60h,.300 lumens

Weight: 120g Code: 764042



Site Equipment

VARTA

Varta Pocket Battery Charger

- Supplied with 2xAA 1,600mah READY2USE batteries
- Small and compact
- Charges AA and AAA best used overnight

Size: 100ml sachet Code: 200359



capital

Capital Safety Equipment Holdall

• Comes with Network Rail logo

Code: 801106



VARTA

Varta Easy Energy Universal **Battery Charger**

- With 5 charging positions
- Charges all rechargeable battery types
- · Best used overnight

Code: 200309



Personal Protective Equipment Bags With Network Rail Logo

- Manufactured in PVC Coated Nylon
- Nylon heavy duty zip
- 30mm woven grip handles and shoulder
- One zip main compartment with bottom board and two zip end pockets
- 38mm woven grip handles

Navy Blue Colour:

Size: 91x30x30cm (36x12x12")

740330 Code:



- Manufactured in 600D polyester/ 420D polyester combination
- Two large end pockets • Internal baseboard

Colour: Navy/Putty Size: 62 x 30 x 30CM Code: 740335





ID Badges

Banksman ID Badge

Code: 882991 **Lookout ID Badge**

Code: 882994

COSS PC ID Badge

Code: 882992

IWA ID Badge

Code: 882995

COSS Site Warden ID Badge

Code: 882993 **ID Badge Carrier**

882996 Code:

Tick Card Remover

Code: 548841



Snood

- Material: 100% polyester microfibre
- Breathable fabric
- Seam free for comfort
- Machine washable/non iron
- Multi-purpose use

Size: 50 x 25 cm Colour: Orange CODE: 300441



Call the PPE Helpdesk (Details on Connect)



in association with

